

HIGH-PERFORMANCE CHIPBOARD SCREW FOR WOOD / TIMBER SCREW



Available Coatings: Zinc-Plated Yellow Zinc-Plated
 MATERIAL: A2 A4 CARBON STEEL
 Sockets : Deep Recess Socket Which does not allow tip displacement
 SIZE Dia : M4 4.5 5 6 8 10 Length: 25-400mm

Head: Countersunk, Wafer, Oval



Self-Countersinking

Allows for perfect insertion in wood, Maxium level flatness when using ironwork .

Self-Cleaning

Ensures correct expulsion of generated wood debris.


Ultra - Sharp Tip

Allows for Screwing with No Prior drilling required. Ultra -sharp tip geometry.

Express thread

Optimized thread diameter and length to guarantee maximum precision and speed during installation.

SUPER STRONG ANTI-CORROSION SCREW

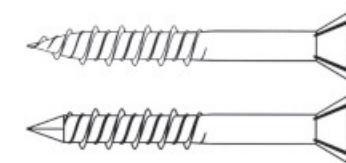

Countersunk / bugle head under head nibs hi-lo thread type17



Cement Board Screw, PHILL EXTRA LARGE FLAT HEAD WITH 8 NIBS UNDER HEAD (4 LONG, 4 SHORT)
 SURFACE : RUSPERT, DACRO
 SIZE: #8 #10LENGTH:1-1/4"-2"

CONCRETE SCREW BOLT



1. Finished Hex Head With Easy to Read size identification
2. Ratchet teeth locks head against fixture Spengler Screw with Sealing Washer A2/A4



3. Thread Type:
M6: Double Lead Thread
M8-M16: Double bottom thread

4. High Helix Angle for fast installation

5. Material : 10B21 Carbon steel , A2, SS410

6. Length:50-300mm

7. Surface treatment: H.D.G. ZINC COATING YELLOW ZINC COATING, Mechanical Galvanized

8. Head Type: Hex Head, Hex Washer Head, Countersunk Head, Pan Head, Round Head, Truss Head

9. Chamfered Tip for easy centering

The concrete screw bolt is a one piece, heavy duty screw anchor with a finish hex head or hex flange head, It's simple to install, easy to identify, full removable and vibration resistant. The concrete screw bolt has many unique features and benefits that make it well suited for many applications in a variety of base materials.



PROFESSIONAL
 FASTENERS AND HARDWARE

NINGBO GEOBO HARDWARE CO.,LTD.

STAINLESS STEEL SERIES WITH NYLONPATCH/ NON-STANDARD PARTS

INDENT HEX WASHER/FLANGE CUPPED HEAD SELF TAPPING/DRILING SCREWS

Electrical Engineering Solutions/Construction



PROFESSIONAL FASTENERS AND HARDWARE

Spengler Screw with Sealing Washer A2/A4



Eye Coupling Nut



Non-Standard Spring Nut



Flat/ Mushroom/Pan Head Split Anchor



Square Drive Countersunk Knife Thread A2/A4 Self tapping screw



Non-Standard Fittings Parts



(Drop Wire) Pig tail wood screw




Sandwich Panels to Heavy section Steel with Double Thread	Fibre cement to light section steel with Wings	Roofing and cladding to heavy section steel with NO.5 Drill	Steel roof sheeting to steel purlins double thread Shank Guard	Hex Flange head self drilling screw
---	--	---	--	-------------------------------------



DIA: 4.8 5.5 6.3 (#10 #12 #14)
Length: 16-152mm(5/8"-6")

Guard Rail Bolts
Typical Material: Low Carbon Steel
Dimensions: In accordance with the drawings or samples
Typical Hardness: HRB 69-100.
Tensile Strength: 60,000PSI Minimum

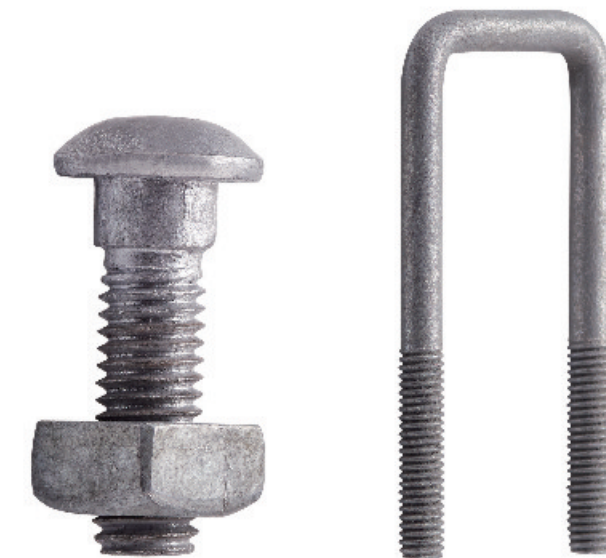

宁波卓邦金属制品有限公司
NINGBO GEOBO HARDWARE CO.,LTD.

Factory Add: MoJian Village, YuYao, Ningbo, China
Office Add: 803#, 3#285 West ShunDa Road, YuYao, Ningbo, China 315400

Tel: +86-574-6255 3786
Fax: +86-574-6255 3796
Email(Skype):info@cngebo.com
Http://www.cngebo.com

